
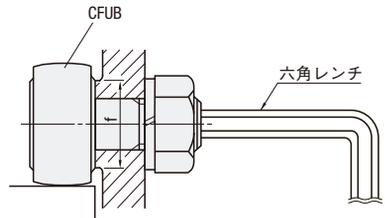


■クラウンタイプ **RoHS**

Type	M材質	A付属品
CFUB	SUJ2	六角ナット1コ(S45C・四三酸化鉄皮膜)

■シール付

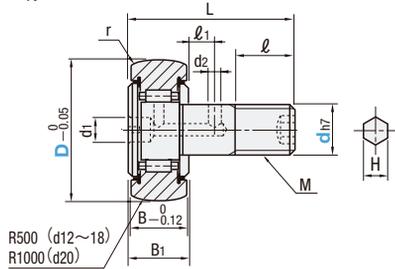

☞使用雰囲気温度 80℃以下



Type	型式		D (選択)	M×Pitch	ℓ	B	B ₁	L	d ₁	d ₂	ℓ ₁	H	r	f (最小)	¥基準単価
	12	dh7許容差													
CFUB	12	0 -0.018	30	12×1.5	14	14	15	40	6	3	6	6	1.5	20	2,680
			32												3,000
	16		35	16×1.5	18	18	19.5	52			8			24	3,250
			18	40	18×1.5	20	20	21.5						58	26
	20			0 -0.021	52	20×1.5	22	24			25.5			66	8

■フラットタイプ **RoHS**

Type	M材質	A付属品
CFFB	SUJ2	六角ナット1コ(S45C・四三酸化鉄皮膜)

D	公差
30	-0.009
32~40	-0.011
52	-0.013

■シール付

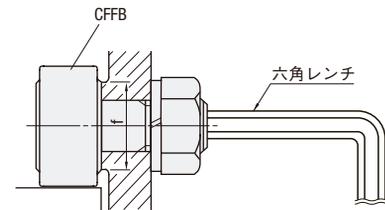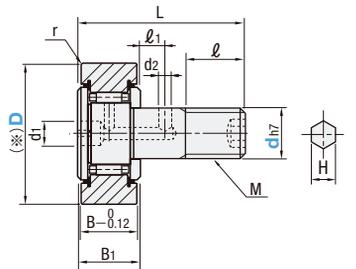

☞使用雰囲気温度 80℃以下

Type	型式		D (選択)	M×Pitch	ℓ	B	B ₁	L	d ₁	d ₂	ℓ ₁	H	r	f (最小)	¥基準単価
	12	dh7許容差													
CFFB	12	0 -0.018	30	12×1.5	14	14	15	40	6	3	6	6	1.5	20	2,460
			32												2,630
	16		35	16×1.5	18	18	19.5	52			8			24	2,650
			18	40	18×1.5	20	20	21.5						58	26
	20			0 -0.021	52	20×1.5	22	24			25.5			66	8

<訂正用>

<1>

Type	型式		D (選択)	M×Pitch	ℓ	B	B ₁	L	d ₁	d ₂	ℓ ₁	H	r	f (最小)	¥基準単価
	12	dh7許容差													
CFUB	12	0 -0.018	30	12×1.5	14	14	15	40	6	3	6	6	1.5	20	2,680
			32												3,000
	16		35	16×1.5	18	18	19.5	52			8			24	3,250
			18	40	18×1.5	20	20	21.5						58	26
	20			0 -0.021	52	20×1.5	22	24			25.5			66	8

<2>

Type	型式		D (選択)	M×Pitch	ℓ	B	B ₁	L	d ₁	d ₂	ℓ ₁	H	r	f (最小)	¥基準単価
	12	dh7許容差													
CFFB	12	0 -0.018	30	12×1.5	14	14	15	40	6	3	6	6	1.5	20	2,460
			32												2,630
	16		35	16×1.5	18	18	19.5	52			8			24	2,650
			18	40	18×1.5	20	20	21.5						58	26
	20			0 -0.021	52	20×1.5	22	24			25.5			66	8