



図面内にF寸法、規格表にd・F寸法を追加

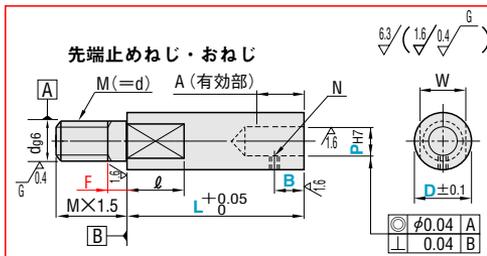

<訂正用>

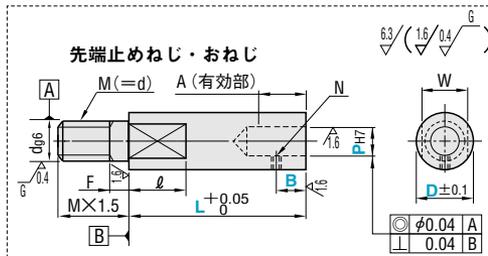

■先端止めねじタイプ

Catalog No.			D	L 指定0.01mm単位	P 選択	B 指定0.5mm単位	d	F	M (並目)	W	ℓ	A	N (並目)
Type	形状記号	材質記号											
SPF(先端止めねじ)	A(おねじ) B(めねじ)	B SU	12	20.00(30.00)~80.00	6	4.0~ 6.0	8	4	M5	10	10	10	M3
			15	20.00(40.00)~80.00	8	5.0~10.0	10	5	M8	13	10	15	M4
			20	20.00(45.00)~80.00	10 12	5.0~15.0	12	5	M8	17	10	20	M4
			25	30.00(50.00)~80.00	12 16	5.0~19.0	16	5	M10	20	12	24	M4
			30	30.00(65.00)~80.00	16 20	5.0~23.0	20	6	M16	24	18	28	M4

☞L寸()はめねじタイプに適用

<訂正用>

■先端止めねじタイプ

Catalog No.			D	L 指定0.01mm単位	P 選択	B 指定0.5mm単位	d	F	M (並目)	W	ℓ	A	N (並目)
Type	形状記号	材質記号											
SPF(先端止めねじ)	A(おねじ) B(めねじ)	B SU	12	20.00(30.00)~80.00	6	4.0~ 6.0	8	4	M5	10	10	10	M3
			15	20.00(40.00)~80.00	8	5.0~10.0	10	5	M8	13	10	15	M4
			20	20.00(45.00)~80.00	10 12	5.0~15.0	12	5	M8	17	10	20	M4
			25	30.00(50.00)~80.00	12 16	5.0~19.0	16	5	M10	20	12	24	M4
			30	30.00(65.00)~80.00	16 20	5.0~23.0	20	6	M16	24	18	28	M4

☞L寸()はめねじタイプに適用