



赤枠内表記を追加

■おねじ付ベアリング RoHS



Type		M 材質		S 表面処理
標準おねじ	ロングおねじ	ベアリング	軸	
NTBG	NTBGT	スチール	SUJ2	無電解ニッケルメッキ
NTSBG	NTSBGT	ステンレス	SUS303	

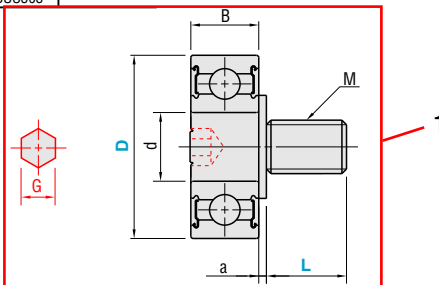


Catalog Type	D	L		B	d	a	G	M (並目)	ベアリング	¥単価 1~4コ			
		標準おねじ	ロングおねじ							NTBG	NTSBG	NTBGT	NTSBGT
標準おねじ NTBG NTSBG ロングおねじ NTBGT NTSBGT	7	4	6	3	3	1.0	1.5	M3	W683ZZ	550	—	580	—
	9	5	8	4	4	1.0	1.5	M4	W684A×50ZZ	580	650	610	660
	13	5	8	5	4	1.0	1.5		624ZZ	550	630	580	650
	16	5	8	5	5	1.0	2.5	625ZZ	500	610	530	660	
	19	8	12	6	6	1.0	4	626ZZ	450	730	510	780	
	22	8	12	7	8	1.0	4	608ZZ	450	750	510	810	
	26	8	12	8	10	2.5	5	6000ZZ	560	—	650	—	
	30	8	12	9	10	2	5	6200ZZ	550	—	630	—	
	32	12	20	9	15	2.5	5	6002ZZ	630	—	760	—	
	35	12	20	11	15	3.0	5	6202ZZ	610	—	780	—	
	37	12	20	9	20	2.5	8	6904ZZ	980	—	1,180	—	
	47	12	20	14	20	3.0	8	6204ZZ	730	—	1,000	—	
	52	12	20	15	25	3.0	10	6205ZZ	780	—	1,160	—	

2

<訂正用>

1

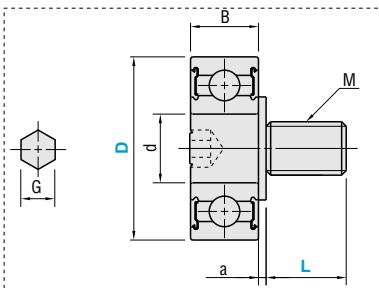

2

7	8	1.0
8	10	2.5
9	10	2
9	15	2.5
11	15	3.0
9	20	2.5
14	20	3.0
15	25	3.0